



M.2 External Storage

RVS03

10Gbps SuperSpeed USB-C 3.2 Gen2 to NVMe / SATA M.2 SSD enclosure

- USB 3.2 Gen2 Type-C interface up to 10Gbps SuperSpeed transfer rate
- Support various lengths of M.2 SSD (22x30mm, 22x42mm, 22x60mm, 22x80mm)
- USB bridge allows auto switch from USB-to-PCIe mode or USB-to-SATA mode
- Support TRIM command set
- Compliant with PCI Express Base Specification Rev. 3.0
- Compliant with NVMe Express Base Specification Rev. 1.3
- Support SATA host in Gen3 speed and full backward compatibility for SATA Gen2 / Gen
- Support Bulk Only Transfer (BOT) and USB Attached SCSI Protocol (UASP)
- Screw-free, tool-less aluminum alloy casing



Specifications


Model No.	SST-RVS03
Color	Black
Material	Aluminum, plastic
Application	USB 3.2 Gen2 Type-C NVMe / SATA M.2 SSD
Controller	Realtek RTL9210B-CG
Drive interface	NVMe or SATA M.2
LED indicator	Powered: Solid Blue Data access: Blinking Blue
USB cable	USB-C to USB-C
Net weight	52.2g
Dimension	105.7mm (W) x 13.5mm (H) x 35mm (D)



USB 3.2 Gen2 Type-C interface up to 10Gbps SuperSpeed transfer rate




Support various lengths of SATA / NVMe M.2 SSD (22x30mm, 22x42mm, 22x60mm, 22x80mm)

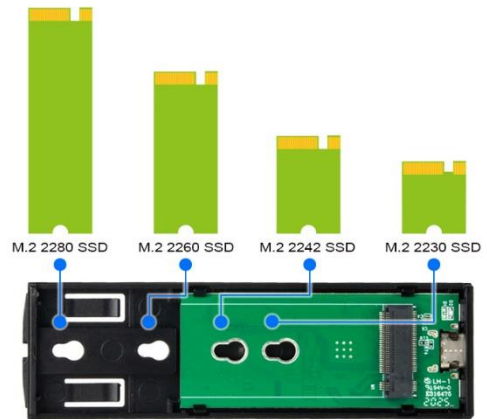

Ease of installation

Simple tool-free design allows for complete installation in just 2 steps.

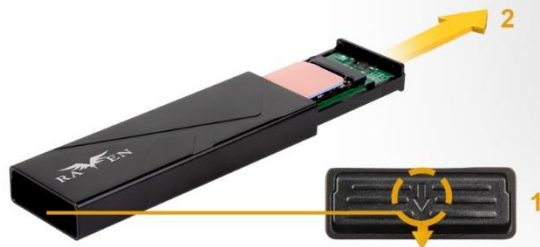

CrystalDiskMark 8.0.0 x64 [Admin]			
File Settings Profile Theme Help Language			
All	3	1GiB	D: 0% (0/931GiB)
			MB/s
	Read (MB/s)	Write (MB/s)	
SEQ1M Q8T1	1041.89	976.01	
SEQ1M Q1T1	883.77	759.17	
RND4K Q32T1	220.81	202.67	
RND4K Q1T1	37.51	70.92	
X570+R7-3800X+980PRO			

