



SILVERSTONE

# SX700




標準SFX電源之新典範

## 700W

### 產品規格

型號	SST-SX700-PT				
最大DC供電	700W				
負載範圍	+3.3V	+5V	+12V	+5VSB	-12V
最大電流 (安培數)	22A	22A	58.4A	2.5A	0.3A
總+3.3V & +5V 輸出	110W				
總+12V輸出	700W				
輸入電壓	90 ~ 264 Vrms				
效率	20% ~ 100% 負載時可達87% ~ 90%				
平均故障間隔	100,000 小時				
接頭	1 x 24 / 20-Pin 主機板接頭(300mm) 1 x 8 / 4-Pin EPS / ATX 12V 接頭(400mm) 1 x 8 / 4-Pin EPS / ATX 12V 接頭 (550mm) 2 x 8 / 6-Pin PCIE 接頭 (400mm / 150mm) 2 x 8 / 6-Pin PCIE 接頭 (550mm / 150mm) 6 x SATA 接頭 ("300mm / 220mm / 100mm" x 2) 3 x 4-Pin Peripheral 接頭 (300mm / 200mm / 200mm) 1 x 4-Pin軟碟機 接頭 (100mm)				
冷卻系統	單92mm FDB 風扇				
尺寸規格	SFX				
認證	80 PLUS Platinum				
重量	0.96 Kg				
尺寸	125 mm (寬) × 63.5 mm (高) × 100 mm (深)				

# 產品特色

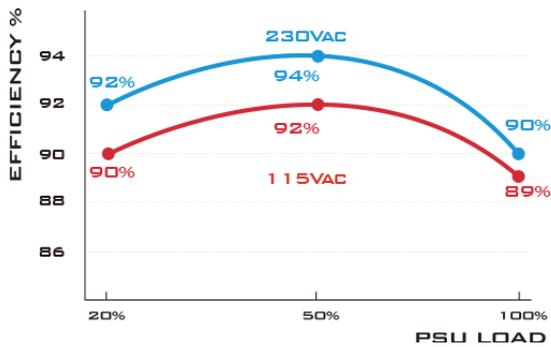

## 高效率表現的 80 PLUS 白金牌認證

80 PLUS白金牌認證的超高效率設計，有效節省電費與廢熱的產生




強大單組+12V輸出設計

## 強大單組+12V輸出設計

滿足高階系統與超頻使用  
對+12V的大量需求



## 全日系電容

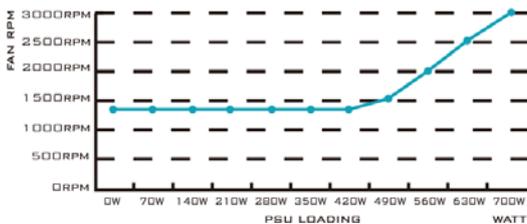

## 92mm FDB風扇


大風量、超靜音的92mm FDB風扇設計，確保工作環境的寧靜舒適性



# 產品特色



8 / 4-Pin EPS / ATX 12V connector x 2



## 全模組化線材

全模組化線材設計，方便小型機殼的理線

**±5%**



**±3%**



## 高穩定±3%電壓穩定

高穩定±3%電壓穩定與超低波紋與雜訊設計



## 銀欣的扁平排線

銀欣的扁平排線設計，可輕易折彎，更有助於理線



## 標準SFX電源尺寸規格

125 mm (寬) x 63.5 mm (高) x 100 mm (深)