




**SILVERSTONE**<sup>®</sup>  
Designing Inspiration

**Dual output power adapter card with 12V DC jack and 5V USB Type-A port**

# ECP01

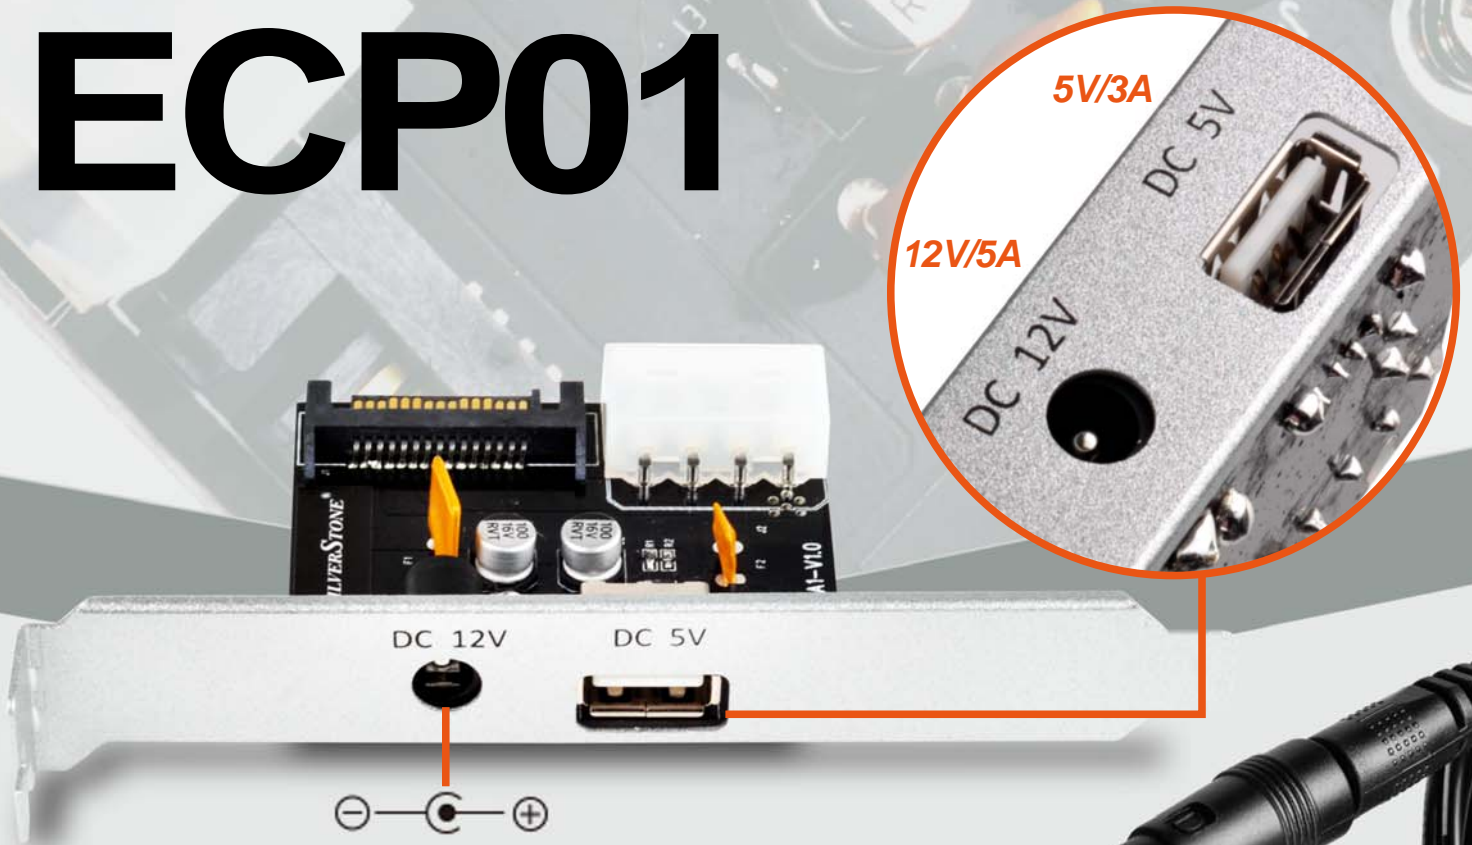

Dual output 12V DC jack up to 5A and 5V USB Type-A port up to 3A  
USB port compliant with USB battery charging specification 1.2

Intelligent over current protect system

**Includes DC to DC cable with 1.2m length, DC dim 2.5mm to DC dim 2.1mm Power Plug Adapter**

Includes optional low profile bracket for supporting low profile cases

## Specifications

Model No.	SST-ECP01	Cable length and specifications	DC plug 1.2m cable with 18AWG x 1 and OD 3.5mm DC dim 2.5mm to DC dim 2.1mm adapter
Input connector and current	Peripheral 4-Pin female connector x 1 (12V/5V) or SATA 15-Pin female connector x 1 (12V/5V)	Net Weight	35g
Output connector and current	DC jack connector x 1 (12V/5A) USB Type-A female connector x 1 (5V/3A)	Dimension	120mm (W) x 21mm (H) x 53mm (D)
Intelligent protect system	Over current protection		

\* Prior to installing ECP01, please calculate your computer's total power consumption to determine if you have enough power to support this card. You should set aside 75W and a dedicated cable to connect directly from the power supply to ECP01. The cable used on the ECP01 should not be shared with any other components in the PC.

### Taiwan Headquarters

12F., No.168, Jiankang Rd.,  
Zhonghe Dist., New Taipei City 235,  
Taiwan R.O.C.

Tel: + 886-2-8228-1238 / Fax: + 886-2-8228-7123  
For sales and purchasing: sales@silverstonetek.com

### USA

13626 Monte Vista Ave. Unit #A,  
Chino, CA 91710,  
USA

Tel: + 1-909-465-9596 / Fax: + 1-909-465-9569  
For General Questions/Sales: usasales@silverstonetek.com

### Europe

Brandstücken 27,  
D-22549 Hamburg,  
Germany

Tel: + 49-40-675931-0 / Fax: + 49-40-675931-66  
For sales and purchasing: sales.eu@silverstonetek.de